

New

BK-10V10T


Old

(HHR-10V10T)

Infrastructure type



■ Dimensions

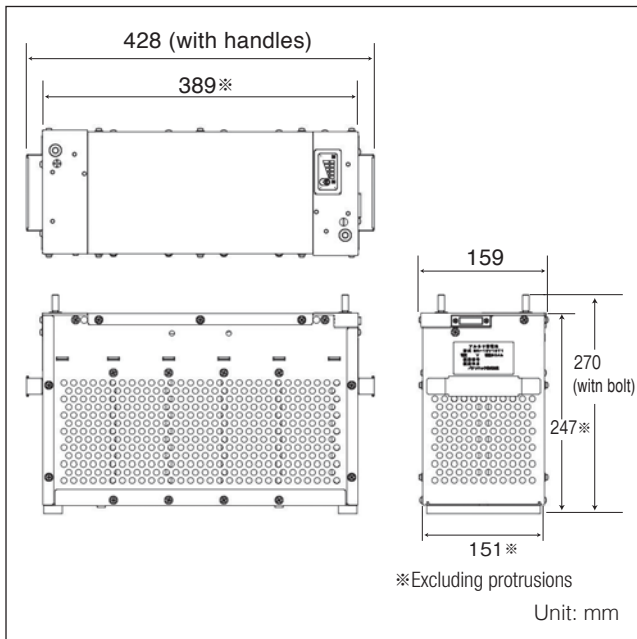

■ Main Specifications

Rated(battery pack)	12 V / 90 Ah
Discharge current	100 A
Operating temperature range	-20 °C to 60 °C
Dimensions(mm)	W: 428 × D: 159 × H: 270
Battery cell	BK-10V1S × 10
Volume	18.4 ℓ
Mass	23 kg
Display function	Remaining capacity

*Specifications subject to change.

*Handle, excluding protrusions.


■ Exclusive battery charger

*Under battery charger development

Battery performance and cycle life are strongly affected by how they are used. In order to maximize battery safety, please consult Panasonic when determining charge/discharge specs, warning label contents and unit design.

*The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.

■ Typical charge characteristics

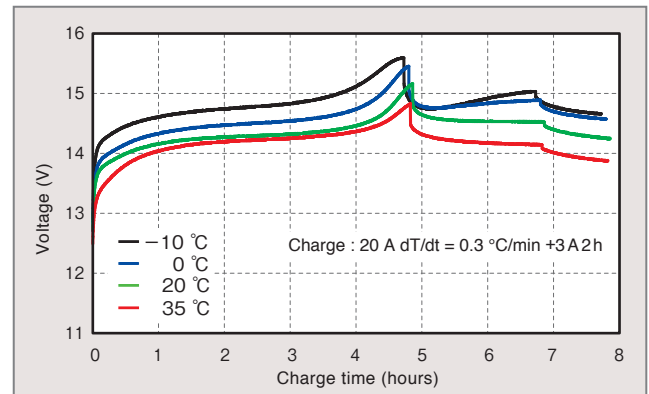

■ Typical discharge characteristics

